


PLAN  
N.T.S.

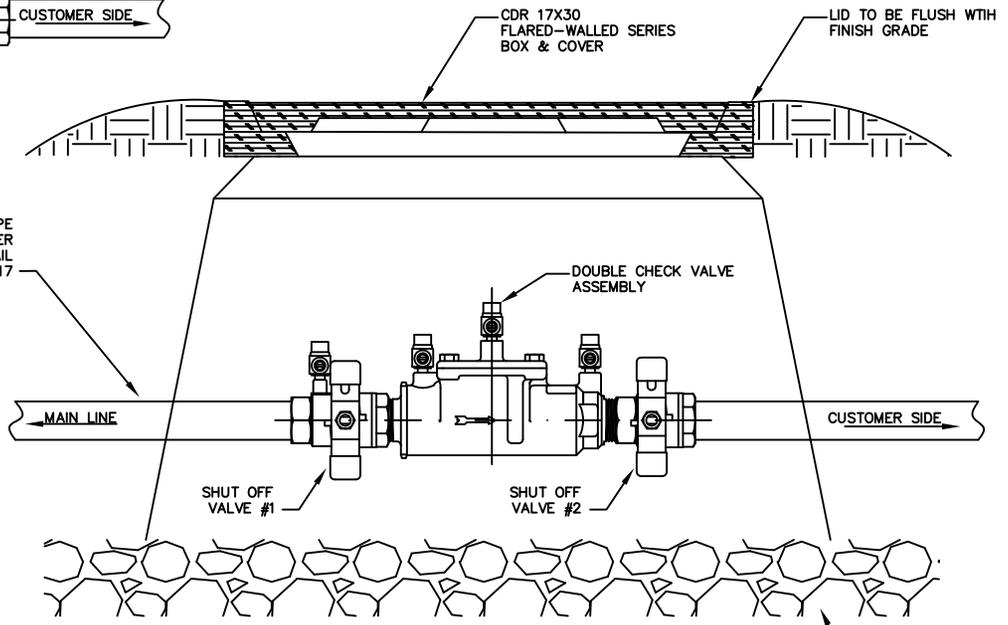

ELEVATION  
N.T.S.

- NOTES:**
1. BACKFLOWS MUST CONFORM TO STATE & LOCAL SPECIFICATIONS.
  2. APPROVED BACKFLOW INCLUDES SHUT OFF VALVES #1 & #2 AS PART OF THE UNIT. NO SUBSTITUTIONS SHALL BE PERMITTED. 6" CLEARANCE SHALL BE WITH VALVE OPEN.
  3. VAULT, DOORS, OR COVERS AND SUPPORT ASSEMBLY SHALL BE DESIGNED PER CURRENT YORK COUNTY SPECIFICATIONS.
  4. TEST COCK #1 SHALL BE UPSTREAM OF SHUT OFF VALVE#1 AND IS PART OF ASSEMBLY.
  5. ABOVE GROUND INSTALLATIONS MUST BE LOCATED BEYOND PROPERTY LINE OR ROAD R/W.
  6. ALL TESTING MUST BE DONE BY A STATE CERTIFIED BACKFLOW PREVENTION TESTER.
  7. INITIAL BACKFLOW DEVICE TEST REPORT MUST BE SUBMITTED TO YORK COUNTY PRIOR TO METER ACTIVATION.

FOR PIPE  
MATERIAL REFER  
TO DETAIL  
11.17

REVISIONS

NO.	DATE	DESCRIPTION

**YORK COUNTY  
ENGINEERING  
STANDARDS**

**1" THRU 2" BACKFLOW ASSEMBLY  
BELOW GROUND**

STD. NO.	11.23
DATE	02/15