


- NOTES:**
1. VALVES INSIDE METER BOX TO BE LEFT-OPEN BALL VALVES AS PER SPECIFICATIONS. ALL VALVES TO BE HANDWHEEL OPERATED.
 2. VAULT TO BE CONSTRUCTED FROM PRECAST REINFORCED RIBBED CONCRETE WALL PANELS. TOP SLAB TO BE PRECAST REINFORCED CONCRETE.
 3. METER TO BE SUPPLIED BY CONTRACTOR. METER TO BE HERSEY MVR MODEL, OR APPROVED EQUAL, AND MUST INCLUDE THE ITRON 60W ENDPPOINT UNIT WITH THE THROUGH-LID ADAPTER.
 4. BOTTOM SLAB TO BE SAME AS WALL PANELS WITH FLAT SIDE UP.
 5. ALL PIPE SHALL BE RESTRAINED JOINT FROM THE TAP TO THE PROPERTY LINE VALVE.
 6. INSTALL 4" DRAIN FROM VAULT TO DAYLIGHT OR STORM DRAIN WITH A BACKWATER CHECK VALVE ACCESSIBLE FROM VAULT.
 7. IF GRAVITY DRAIN IS NOT POSSIBLE AN APPROVED SUMP PUMP DRAINAGE SYSTEM SHALL BE INSTALLED.
 8. IF VAULT DEPTH IS GREATER THAN 5', AN APPROVED LADDER SHALL BE INSTALLED.

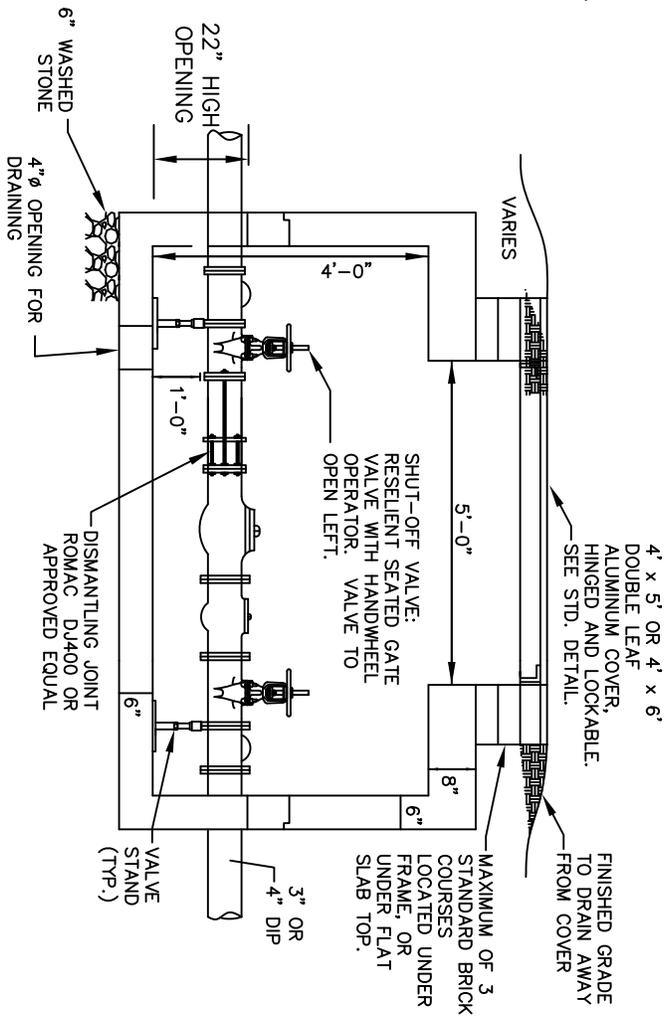

**YORK COUNTY
ENGINEERING
STANDARDS**

**WATER METER BOX
3" AND 4"**

REVISIONS

NO.	DATE	DESCRIPTION
1	1/10	ADDED NOTES 6-8
2	3/12	ADDED DISMANTLING JOINT

STD. NO.	11.20
DATE	09/06