


NOTE:
 ALL INTERSECTING ASPHALT ROADS & DRIVES CUT DURING CONSTRUCTION ARE TO BE OVERLAYED WITH AN ASPHALT SURFACE COURSE EXTENDING FROM THE EDGE OF THE ROADWAY TO THE STREET RIGHT-OF-WAY & EXTENDING THE FULL WIDTH OF THE INTERSECTING ROAD. THE OVERLAY IS TO BE PLACED IN ACCORDANCE WITH THE "REQUIREMENTS FOR NEW ASPHALT OVERLAY."

REQUIREMENTS FOR NEW ASPHALT OVERLAY

- A. BROOM CLEAN ALL PAVEMENT TO BE OVERLAID.
- B. APPLY TACK (0.05-0.15 GAL./S.Y., TARGETING 0.10 GAL./S.Y.).
- C. APPLY HOT LAID TYPE 1A ASPHALT SURFACE COURSE AT A RATE OF 150 LBS./S.Y.-IN., AND COMPACT TO 1-1/2" THICKNESS.

REVISIONS

NO.	DATE	DESCRIPTION

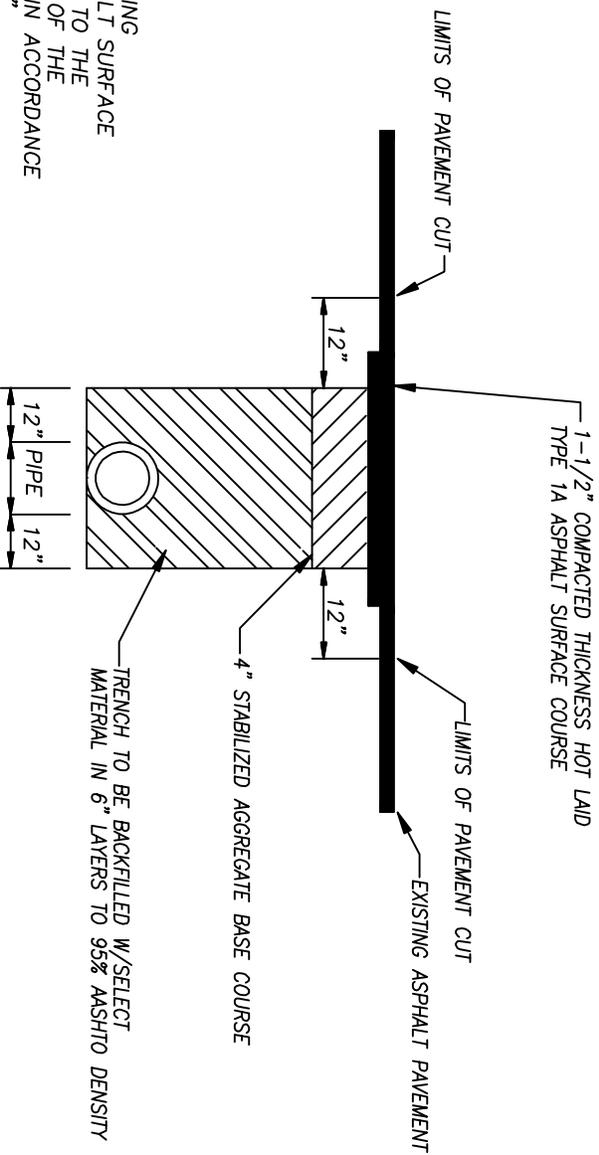

PLAN VIEW
 N.T.S.

YORK COUNTY ENGINEERING
 STANDARDS

OPEN-CUT & REPAIR
 ASPHALT DRIVEWAY

STD. NO.	15.18
DATE	02/09